





S E R I E S

SE ADDENDUM



iQ5SE

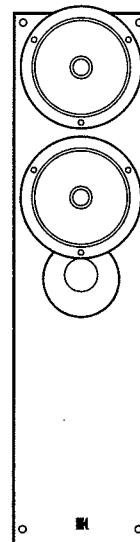

iQ7SE

	iQ5SE	iQ7SE
Design	Two and a half-way bass reflex	Two and a half-way bass reflex
Drive units	130mm (5.25 in) LF 130mm (5.25 in) Uni-Q 19mm (0.75 in) alu dome HF	165mm (6.5 in) LF 165mm (6.5 in) Uni-Q 19mm (0.75 in) alu dome HF
Frequency response	40Hz - 40KHz	36Hz - 40KHz
Crossover frequency	2.0kHz	2.0kHz
Amplifier requirements	15-130W	15-150W
Sensitivity (2.83V/1m)	88dB	90dB
Maximum output	109dB	111dB
Nominal impedance	8Ω	8Ω
Magnetic shielding	Yes	Yes
Weight	10.2kg (22.5lbs)	14.5kg (32lbs)
Dimensions H x W x D	815 x 175 x 261 mm 32 x 6.9 x 10.3 in.	865 x 220 x 327 mm 34 x 8.7 x 12.9 in.

KEF Audio reserve the right, in line with continuous research and development, to amend or change specifications without prior notice. E&O.E.

GP Acoustics (UK) Ltd, Eccleston Road, Tovil, Maidstone, Kent, ME15 6QP UK. Telephone: +44 (0)1622 672261 Fax: +44 (0)1622 750653

www.kef.com

